


Breakers 110 Amp to 250 Amp

Breakers 15 Amp to 100 Amp
Bolt-in or Snap-in styles

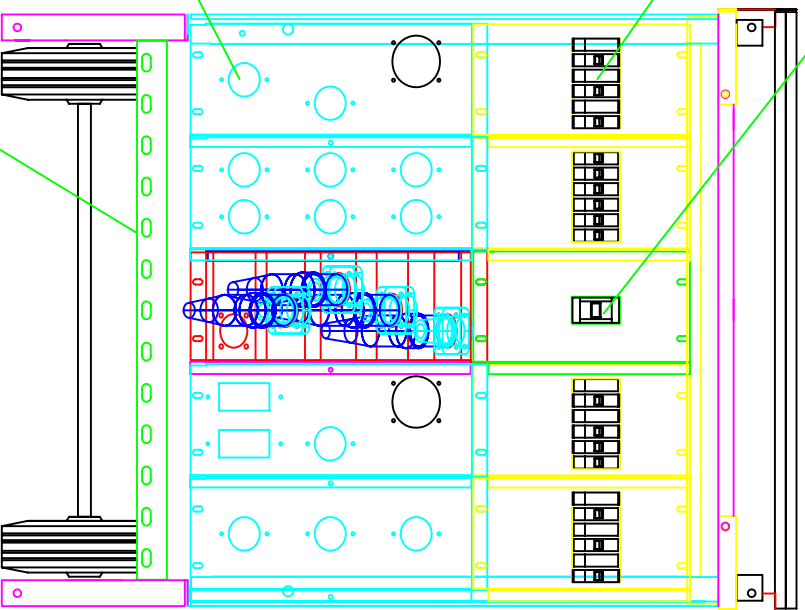

Features of the GFlex Modular Construction

Electrical Ratings:

400A MLD 120\208v 3Ø 5wire
or 400A MLD 120\240v 1Ø 4 wire
Main breakers can be added with a
amperage derate to 250 amps or less.

4-Box sizes available

- 4-Module (2 front and 2 back)
- 6-Module (3 front and 3 back)
- 8-Module (4 front and 4 back)
- 10-Module Shown (5 front and 5 back)

Input requires 1 module.

Unfused feed thru's require 1 module.

Each Module (5.5" wide) can be set up for
Low amperage (up to 100a)
High amperage (110 to 225a)

Modules can be replaced in the field
with different receptacle configura-
tions (within the low or high range)

Cabinet (Type 3R) is made from .100 Alum.

Leg set is 10 ga steel for G8 & G10
Leg set is 12 ga steel for G4 & G6
Handle and leg sets are replaceable.
Handle, lifting eyes and corner pads
are powder-coated steel.

Prox weight: 125-210 # depending on
out-put configuration.



UNLESS NOTED	DECIMAL TOLERANCES
.XX+OR-.03"	FRACTIONS
.XXX+OR-.01	+OR-1/32"

P.O. BOX 128 • 309 N.E. 1st STREET • ALTA, IOWA 51002

TITLE GFlex Portable Power Distribution System

PART NAME Front Internal View PART NO.

DIRECTORY E:\CAD\Gflex FILE G10Front.dwg

CUSTOMER GULL WING INDUSTRIES INC. MAT'L.

DESIGNED BY C.A.W. APPROVED BY

DATE 01-02-04 SCALE SHEET OF

SYM REVISION BY DATE